


SERIES 9C DUAL SENSORS TYPE 02, 31 & 32

Wiring Diagram

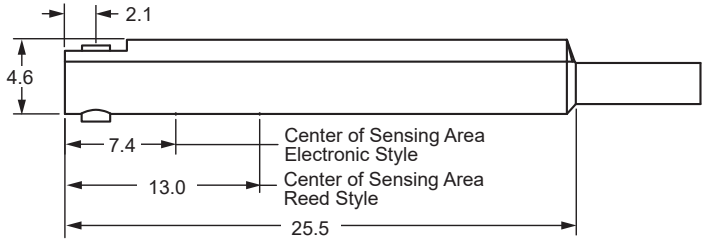

Type 02

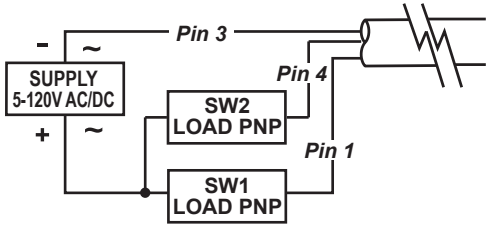





Female Connector

Male Connector


Type 31

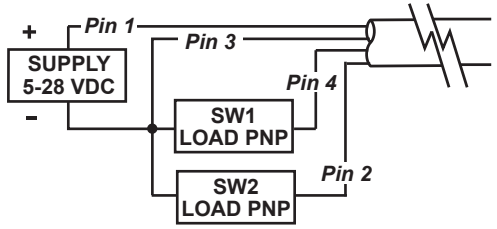


GROOVE DIMENSIONS



Type 32

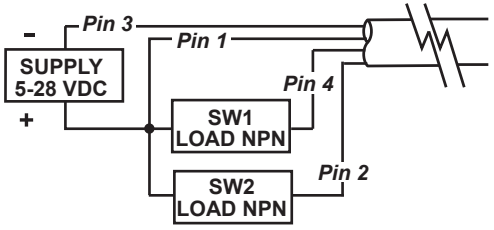





Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch for PLC's, Red LED (current limiting)	Normally Open SPST	5 - 120V AC/DC 50/60 Hz	0.03 Amps Max. 0.001 Amps Min.	4 watts Max.	5.0 Volts @ 5mA	85 Ga.
31	Electronic for Reed Magnet, Yel LED & Sourcing	Normally Open PNP	5 - 28 VDC	0.5 Amps Max.	14 watts Max.	.5 Volts @ 500mA	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 28 VDC	0.5 Amps Max.	14 watts Max.	.5 Volts @ 500mA	40 Ga.


SERIES 9C DUAL SENSORS TYPE 02, 31 & 32

Wiring Diagram

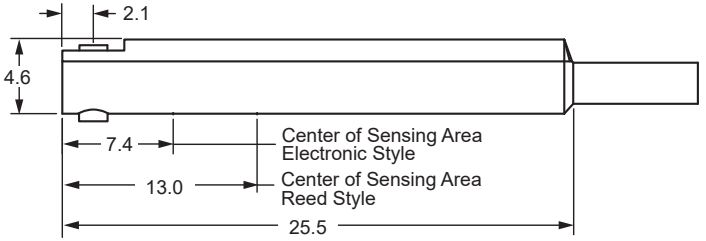

Type 02

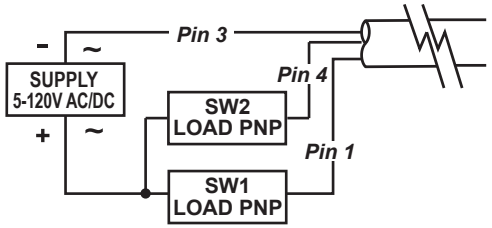





Female Connector

Male Connector


Type 31

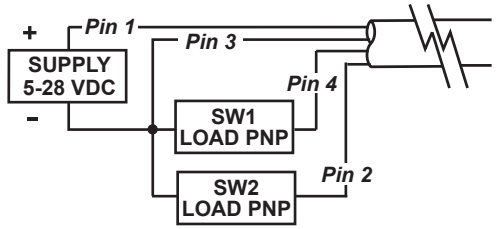


GROOVE DIMENSIONS



Type 32

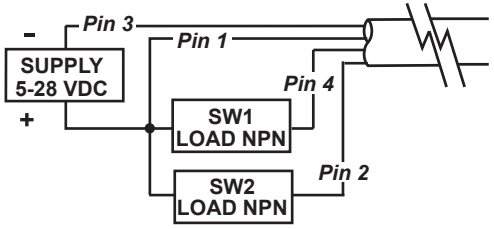



Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch for PLC's, Red LED (current limiting)	Normally Open SPST	5 - 120V AC/DC 50/60 Hz	0.03 Amps Max. 0.001 Amps Min.	4 watts Max.	5.0 Volts @ 5mA	85 Ga.
31	Electronic for Reed Magnet, Yel LED & Sourcing	Normally Open PNP	5 - 28 VDC	0.5 Amps Max.	14 watts Max.	.5 Volts @ 500mA	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 28 VDC	0.5 Amps Max.	14 watts Max.	.5 Volts @ 500mA	40 Ga.

A56-1711 Rev. 01