


SERIES 9K DUAL SENSORS TYPE 02, 31 & 32

Wiring Diagram

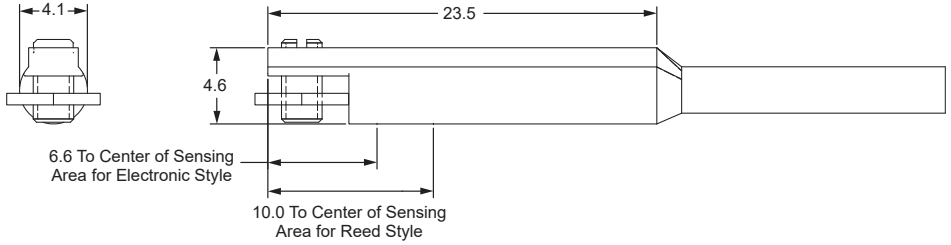


Type 02

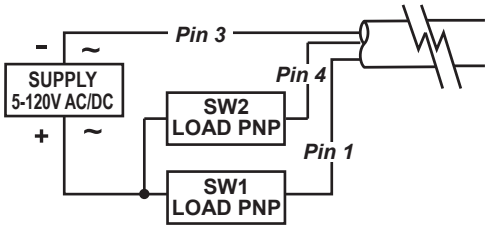




Female Connector | Male Connector


Type 31

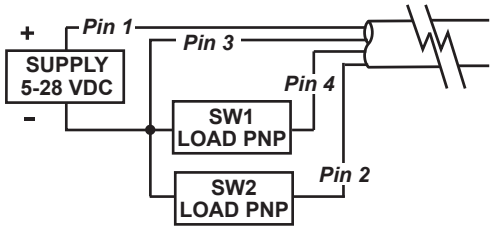


GROOVE DIMENSIONS



Type 32

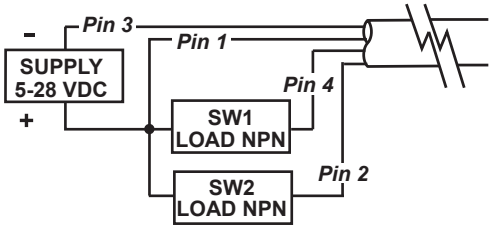





Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch w// Red LED	SPST	5-120V AC/DC	0.03 Amps. Max	4 watts Max.	2.5 Volts	60 Ga.
31	Electronic for Reed Magnet, Yel LED & Sourcing	Normally Open PNP	5 - 28 VDC	0.2 Amps Max.	4.8 watts Max.	.5 Volts	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 28 VDC	0.2 Amps Max.	4.8 watts Max.	.5 Volts	40 Ga.


SERIES 9K DUAL SENSORS TYPE 02, 31 & 32

Wiring Diagram

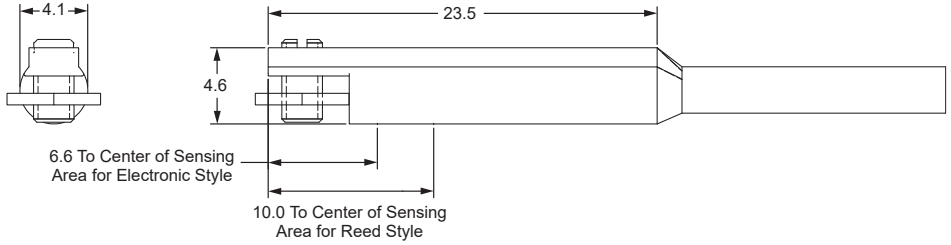


Type 02

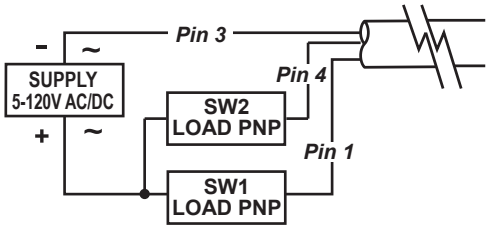




Female Connector | Male Connector


Type 31

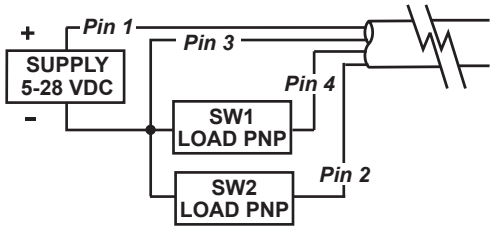


GROOVE DIMENSIONS



Type 32

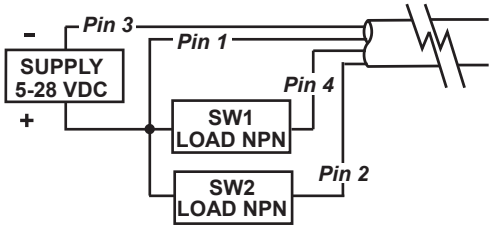



Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch w// Red LED	SPST	5-120V AC/DC	0.03 Amps. Max	4 watts Max.	2.5 Volts	60 Ga.
31	Electronic for Reed Magnet, Yel LED & Sourcing	Normally Open PNP	5 - 28 VDC	0.2 Amps Max.	4.8 watts Max.	.5 Volts	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 28 VDC	0.2 Amps Max.	4.8 watts Max.	.5 Volts	40 Ga.

A56-1716 Rev. 01